

# FLIR T650sc

## Portable Thermal Imaging Camera



The T650sc infrared camera offers thermal and visual imagery, excellent spot size resolution, and reliable temperature measurement accuracy—all at an affordable price. Technicians, engineers, and scientists will appreciate features such as a built-in digital camera, voice annotation, laser target locator, GPS, and much more. The tiltable IR unit gives you great flexibility and allows you to conduct your experiments fast and in a comfortable position.

### EXCELLENT IMAGE QUALITY AND THERMAL SENSITIVITY

The T650sc camera is equipped with an uncooled Vanadium Oxide (VOx) microbolometer detector that produces thermal images of 640 x 480 pixels. It generates crisp and clear detailed pictures that are easy to interpret, resulting in reliable imaging with high accuracy.

### TOUCH SCREEN

The high quality LCD touch screen presents sharp and bright images and brings interactivity and user comfort to a new level. In combination with the large backlit buttons and joystick, the camera is very easy to use.

### RADIOMETRIC RECORDING

The T650sc allows for full dynamic video streaming to a PC using USB or to mobile devices using Wi-Fi. It can also record visual and thermal non-radiometric MPEG-4 video files. The T650sc can record radiometric IR sequences in real-time directly on the camera. These sequences contain all temperature data and can be post analyzed during playback on the camera or PC.

### RICH FEATURE SET

The T650sc comes with features such as Multi Spectral Dynamic Imaging (MSX<sup>®</sup>), UltraMax<sup>™</sup> image enhancement, auto-image rotation, image sketch, and autofocus. It is equipped with Auto Hot/Cold Spot and Audible/Visual Alarms. On-screen emissivity tables, up to 5 temperature measurement spots, and Delta T functionality mean you can quickly acquire and easily compare temperature data.

### SOFTWARE


The FLIR T650sc camera works seamlessly with FLIR ResearchIR Max software, enabling intuitive viewing, recording, and advanced processing of thermal data.

### MATHWORKS<sup>®</sup> MATLAB


Control the T650sc and capture data directly into MathWorks<sup>®</sup> MATLAB software for advanced image analysis and enhancement.

### KEY FEATURES

- Thermal and visual camera
- VOx uncooled microbolometer: 640 x 480 pixels
- Measures temperatures up to +2,000 °C
- Accuracy of +/- 1 °C
- Multi Spectral Dynamic Imaging (MSX<sup>®</sup>)
- UltraMax<sup>™</sup> for up to 1.2 MP thermal resolution
- Software included

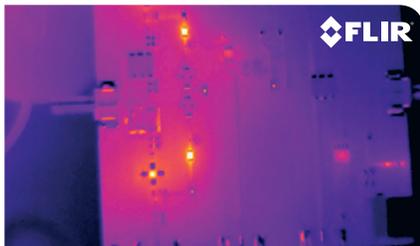

Thermal image without MSX.

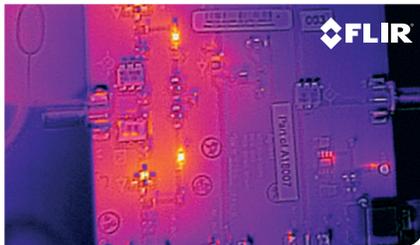

Thermal image with MSX. MSX allows you to see even more detail on the thermal image.



## Specifications

System Overview		T650sc
Detector Type	Uncooled Microbolometer	
Spectral Range	7.5 – 13.0 $\mu\text{m}$	
Resolution	640 x 480	
Detector Pitch	17 $\mu\text{m}$	
NETD	<20 mK	
Electronics / Imaging		
Time Constant	<8 ms	
Frame Rate	30 Hz	
Dynamic Range	14-bit	
Digital Data Streaming	Real-time Radiometric = USB to PC Real-time Non-radiometric = MPEG via USB to PC	
On-Camera Radiometric Recording	Real-time Temperature Calibrated Movie Recording at 30 Hz to SD card	
Analog Video	DVI over HDMI	
GPS	Location Data Stores with Every Image	
Command & Control	USB, WiFi	
Measurement		
Object Temperature Range	-40°C to 150°C (-40°F to 302°F) +100°C to 650°C (+212°F to 1202°F)	
Accuracy	$\pm 1^\circ\text{C}$ ( $\pm 1.8^\circ\text{F}$ ) or $\pm 1\%$ of reading for limited temperature range for measuring object within +5°C to +120°C (+41°F to +248°F) and ambient temperatures of +10°C to +35°C (+49°F to +95°F) This is only valid for the temperature range -40°C to +120°C (-40°F to +248°F)	
Optics		
Camera f/#	f/1.0, Integrated Lens 18 mm (25°)	
Available Lenses	88.9 mm (7°), 41.3 mm (15°), 24.6 mm (25°), 13.1 mm (45°), 6.5 mm (80°)	
Close-up Lenses / Microscopes	Close-up (25 $\mu\text{m}$ ), (50 $\mu\text{m}$ ), (100 $\mu\text{m}$ )	
Focus	Continuous Automatic or Manual (Motorized and Tactile)	
Image Presentation		
On-Camera Display	Touch Screen/4.3 in LCD Display (800 x 480) LCD Viewfinder (800 x 480)	
Auto-Orientation	Keeps Onscreen Temperature Data Upright in Portrait or Landscape	
Automatic Gain Control	Manual, Linear, Histogram, DDE	
Image Analysis	Spot Meters, Areas, Auto Hot / Cold Detection, Difference Temp, Isotherms, Alarms, Line Profile	
Image Annotations	60 Sec Voice, Text, 4 x Markers, Sketch	
Visible Image	5.0 Megapixel from Integrated Visible Camera	
MSX® Enhancement/ Picture in Picture	Adds Visible Detail to Thermal/P-i-P Overlays Thermal on Visible Image	
UltraMax™ Image Enhancement	Increases Number of Pixels up to 4x Via Software	
General		
Operating Temperature Range	-15°C to 50°C (5°F to 122°F)	
Storage Temperature Range	-40°C to 70°C (-40°F to 158°F)	
Encapsulation	IP 54 (IEC 60529)	
Bump / Vibration	25 g (IEC 60068-2-29) / 2 g (IEC 60068-2-6)	
External Power	AC Adapter 90-260 VAC, 50/60 Hz or 12 V from a Vehicle	
Battery System	Li Ion, 4 Hours Operating Time	
Weight w/ Battery	1.3 kg (2.87 lb)	
Size (L x W x H)	143 x 195 x 95 mm (4.2 x 7.9 x 4.9 in)	
Mounting	¼"-20	



**PORTLAND**  
Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

**NASHUA**  
FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 06063  
USA  
PH: +1 866.477.3687

**EUROPE**  
FLIR Systems  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5100

**UK**  
FLIR Systems UK  
2 Kings Hill Avenue  
Kings Hill  
West Malling - Kent  
ME19 4AQ  
United Kingdom  
PH: +44 (0)1732 220 011

**SWEDEN**  
FLIR Systems AB  
Antennvägen 6,  
PO Box 7376  
SE-187 66 Täby  
Sweden  
PH: +46 (0)8 753 25 00

**LATIN AMERICA**  
FLIR Systems Brasil  
Av. Antonio Bardella, 320  
Sorocaba, SP 18052-852  
Brasil  
TEL: +55 15 3238 7080

**HONG KONG**  
FLIR Systems Co., Ltd  
Rm 1613-16, Tower II  
Grand Central Plaza  
138 Shatin Rural  
Committee Road Shatin,  
New Territories  
Hong Kong  
TEL: +852 2792 8955

**CANADA**  
FLIR Systems, Ltd.  
920 Sheldon Court  
Burlington, ON L7L 5L6  
Canada  
PH: +1 800.613.0507

[www.flir.com/research](http://www.flir.com/research)  
NASDAQ: FLIR

Specifications are subject to change without notice  
©Copyright 2016, FLIR Systems, Inc. All other brand and product names are trademarks of their respective owners. The images displayed may not be representative of the actual resolution of the camera shown. Images for illustrative purposes only. (Updated 01/06/16)